



# SPACE GREY POWER

## ISOLATED OUTPUT AND ISOLATED GND

### OWNER'S MANUAL


**Demonfx<sup>®</sup>**

Thank you for purchasing this product.

In order to use this product properly and safely, please read this owner's manual carefully before operating this product, and keep it for future reference

The power supply has 10 DC outputs and 1 standard USB output, two outputs can be Adjusted between 9V, 12V, and 18V. The 5v USB output enables you to load your music Led light, cellphone, iPad and other portable devices.

#### Panel Instruction

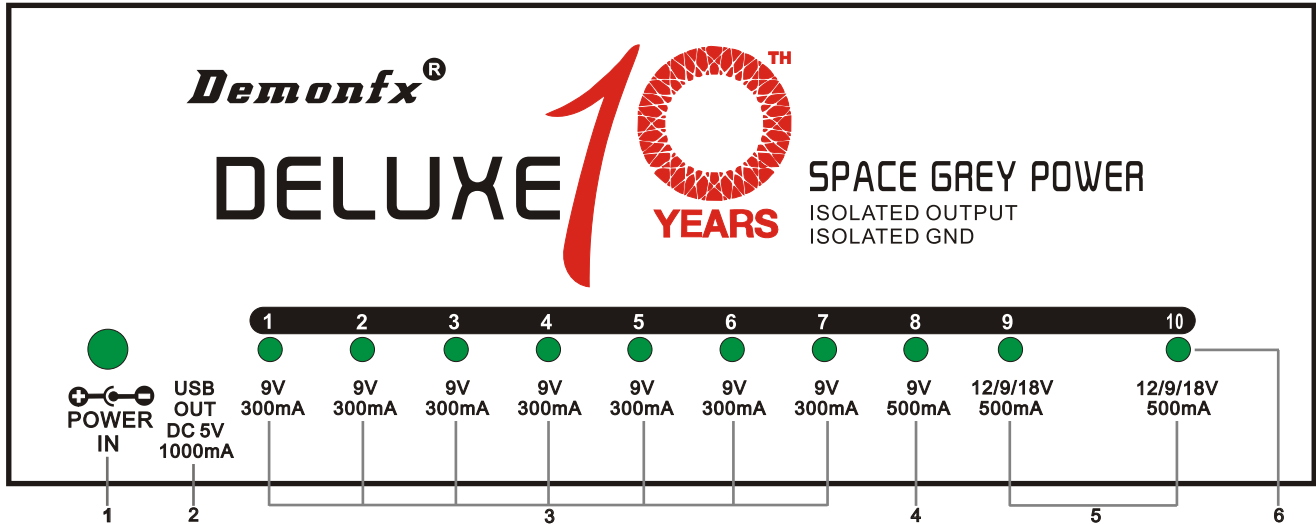

- (1) DC Input Jack: Plug the included adaptor (DC12V, 2,500mA) into the jack, and do not use adapter from elsewhere.
- (2) USB output jack: DC5V max1000mA; use for music light, cellphone, iPad and other portable device.
- (3) 1- 7 DC outputs : DC 9V, max300mA  $\oplus \ominus$ ; they are suitable for ordinary effectors. The LED will be on when plug the included DC cable to the output jack, each output has a overload and short-circuit protection circuit, the LED power indicator goes out if any output overload or short-circuit protected.
- (4) DC output: DC 9V max 500mA  $\oplus \ominus$ ; suitable for digital effects pedals, normally the LED will be on when plug the included DC cable to the output jack, each output has a overload and short-circuit protection circuit, the LED power indicator goes out if any output overload or short-circuit protected.
- (5) Two adjustable DC outputs : DC 9V/12V/18V, max 500mA  $\oplus \ominus$  power output, it can adjust by a switch, normally the LED will be on when plug the included DC cable to the output jack, each output has a overload and short-circuit protection circuit, the LED power indicator goes out if any output overload or short-circuit protected.
- (6) 1 to 10 outputs LED power indicator: each DC output jack has a related LED power indicator, the LED power indicator goes out if any output overload or short-circuit protected.

Note :The LED will be on only when plug the included DC cable to the output jack.

#### Features:

1. One USB 5V 1000mA output, used for music led, cellphone, iPad and other portable devices
2. 7 Outputs DC 9V 300mA outputs
3. 1 Output DC 9V 500mA outputs
4. 2 Outputs DC 9V/12V/18V adjustable outputs, maximum output current is 500mA
5. All DC outputs are isolated output and isolated GND

#### Packing list:

- 1 \*pc power supply
- 1 \*pc 12v 2500mA power adapter
- 10 \*pcs DC Cables
- 1 \*pc reversed polarity
- 1 \*pc 3.5mm Converter
- 1 \*pc Battery Clip Converter
- 1 \*pc owner's manual

E:info@demon-fx.com .www.demon-fx.com